

HIGH FLOW STAINLESS STEEL AIR PUMP

Boltight's higher oil flow, stainless steel air driven hydraulic pump has been designed for use in a corrosive environment such as Subsea. The pump has a large 15 litre oil reservoir and can be used with all Boltight 1500 bar tooling. It is ideal for projects where speed of operation is essential.



SPECIFICATION

- Mounted in a stainless steel transportable frame.
- 1600 litres air per minute (56 standard cubic feet per minute).
- Air pressure required 4-7 bar (60-100 psi).
- 31kg.
- Oil reservoir 15 litre ISO 10, 32, 46.
- Hydraulic Oil.
- Dual Scale 0-2000 bar (0-29000 psi) pressure gauge.
- 1500 bar working pressure.
- CEJN 116 hydraulic connection.



FEATURES

- Offers air/hydraulic pump and high pressure oil outlet with a self-sealing quick connect coupling.
- Easy to use.
- All tools are pressure tested and issued with a test certificate.

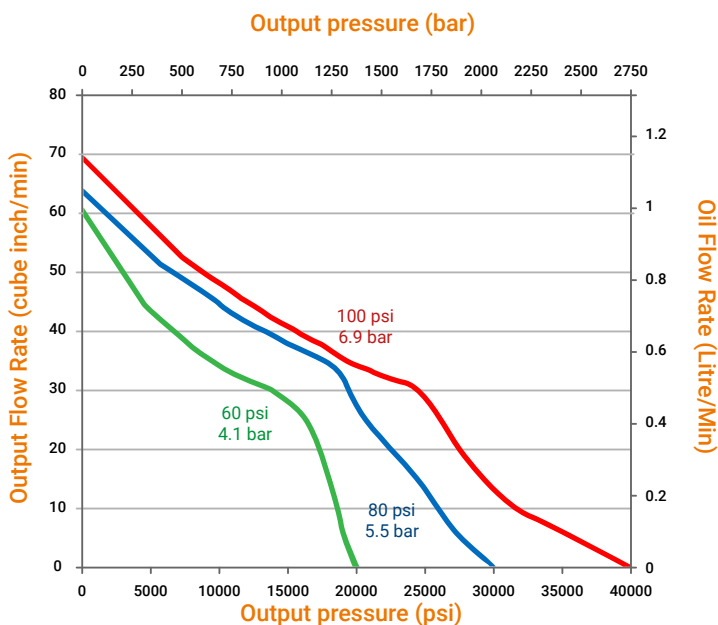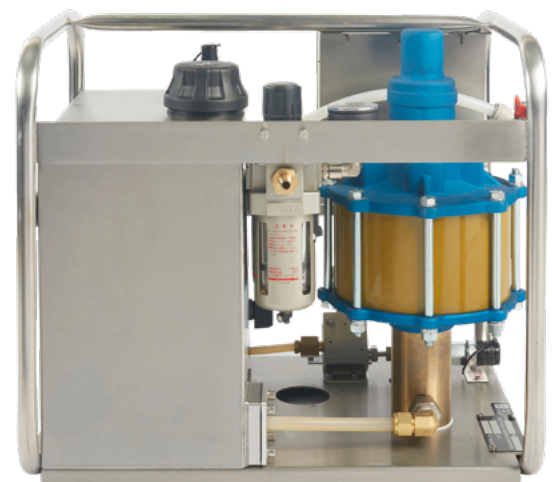

Production Unit
Boltight Limited
 Tel: +44 (0) 845 500 5556
 Email: sales@boltight.com
 www.boltight.com

Sales Office
Nord-Lock Ltd
 Tel: +44 (0) 1264 355557
 Email: enquiries@nord-lock.co.uk
 www.nord-lock.com

Sales Office
Nord-Lock International AB
 Tel: +46 (0) 0 602 46 00
 www.nord-lock.com